


Kasco® 3/4HP Multi-Display Floating Fountain
5 different spray patterns in one fountain




Cypress

6' Tall x 16' Wide Arch

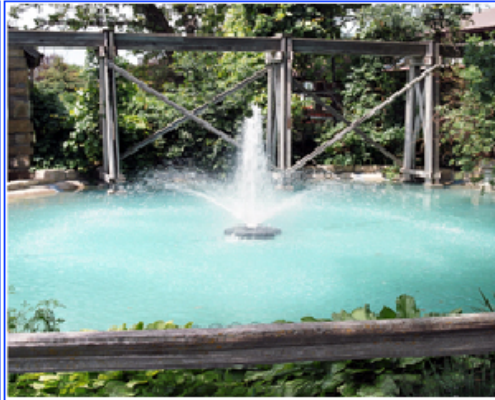

Linden

6.5' x 3' Inner & 3.5' x 20" Outer Tier

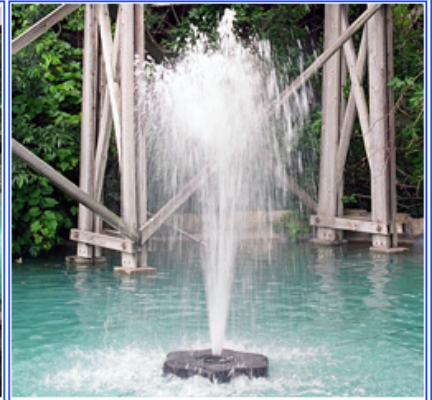


Sequoia

7' Tall x 4' Wide Geyser



Willow

4.5' Tall x 15' Wide "V"

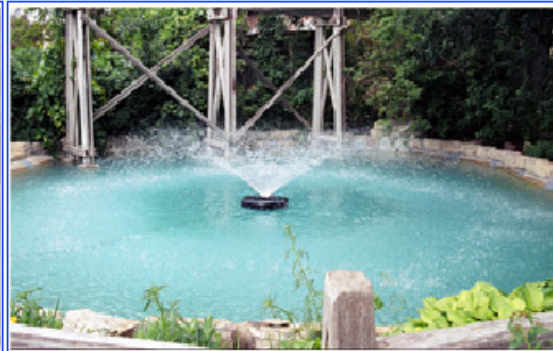


Juniper

3' Tall x 20' Wide "V"



- Longer-life top and bottom ball bearings
- Environmentally friendly oil-filled motor with a hard-face internal mechanical seal and external lip seal for protection against leaks.
- Flood oil lubricated for excellent heat dissipation.
- Highly efficient, lower power consumption than competitive equipment
- Superior dependability in salt-water or other corrosive environments. All external metal motor, float, and hardware components are of stainless steel composition and protected by a sacrificial zinc anode.
- Requires minimal maintenance. We recommend cleaning the stainless steel motor housing once or twice per year and replacing the sacrificial zinc anode when visibly corroded.
- ETL listed to stringent UL and CSA Safety Standards

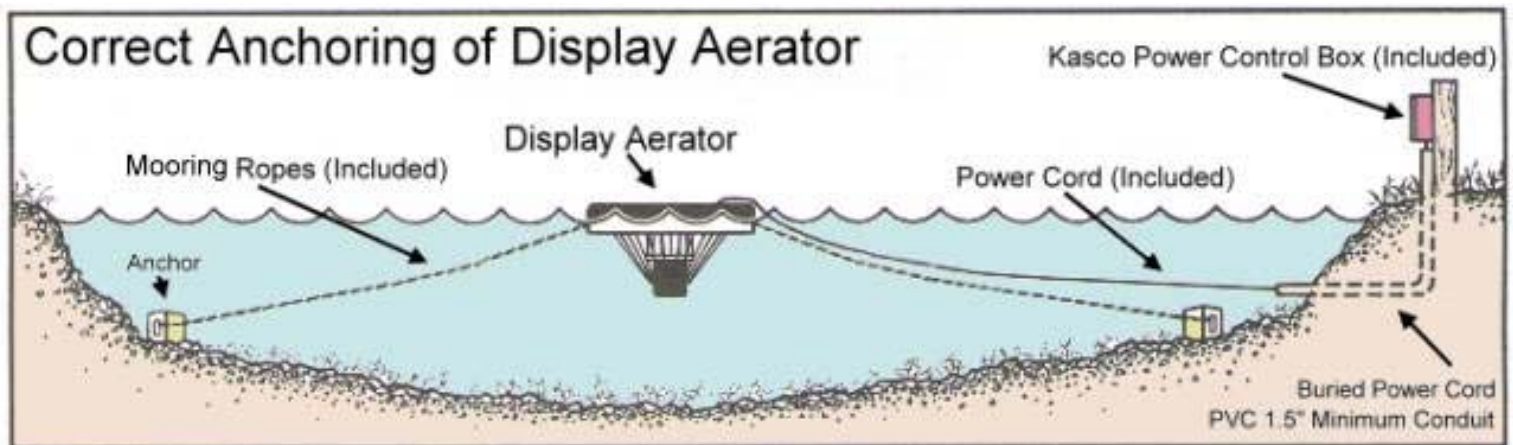

The ¾ HP, 120V Floating Aerating Fountain includes a GFCI protected control box. The Control Panel with Timer, GFCI protection, and Photo Eye for light operation, comes standard with the F3400/VFX Floating Aerating Fountain. The Photo Eye allows you to set your timer for the hours of operation and when, during those hours, it is dark, the Photo Eye will turn on the Optional Light Kit. No electrician is required to install your Control Panel Fountain if an existing 120V, 15 amp receptacle is available.



Tel: 450-243-0976 Fax: 450-243-1834 Email: info@canadianpond.ca